




Polar pattern:	cardioid
Frequency range:	65 Hz to 20 kHz
Sensitivity:	4 mV/Pa (-48 dBV re 1 V/Pa)
Max. SPL for 1% / 3% THD:	140 / 145 dB SPL
Equivalent noise level:	25 dB(A) to DIN 45412
Impedance:	≤ 200 ohms
Re commended load impedance:	≥ 2000 ohms
Connector:	3-pin XLR
Finish:	matte gray-blue
Size:	length: 185.2 mm (7.3 in.); diameter: 51 mm (2 in.)
Net weight:	345 g (12.2 oz.)
Shipping weight:	660 g (1.5 lbs.)
Patents:	electrode backing for a condenser transducer (patents nos. AT 392.182, DE 4.021.661)

This product conforms to the standards listed in the Declaration of Conformity. To order a free copy of the Declaration of Conformity, visit <http://www.akg.com> or contact [sales@akg.com](mailto:sales@akg.com).

## Frequency Response

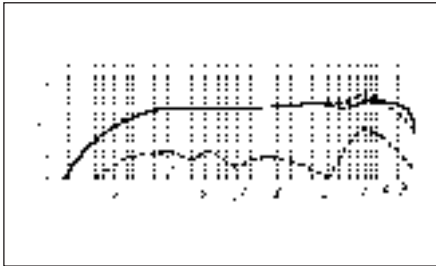

## Polar Diagram

