


Type:	pre-polarized condenser microphone
Polar pattern:	cardioid
Frequency range:	80 Hz to 20,000 Hz
Sensitivity:	35 mV/Pa (-46 dBV re 1 V/Pa)
Electrical Impedance at 1000 Hz:	≤ 200 ohms
Recommended load impedance:	≥ 2000 ohms
Max. SPL for 1% / 3% THD:	126 dB / 130 dB
Equivalent noise level:	22 dB(A) to DIN 45412
Supply voltage:	B 29 L battery supply, MPA V L phantom power adapter, or AKG WMS bodypack transmitter
Current consumption:	approx. 2 mA
Cable length/Connector:	1.5 m (5 ft.) / 3-pin mini XLR
Finish:	matte black
Size (microphone only):	length: 195 mm (7.7 in.); max. dia.: 134 mm (5.3 in.)
Net weight (microphone l/cable):	26 g (0.9 oz.)
Shipping weight:	260 g (9.2 oz.)

This product conforms to the standards listed in the Declaration of Conformity. To order a free copy of the Declaration of Conformity, visit <http://www.akeg.com> or contact sales@akeg.com.

Frequency Response

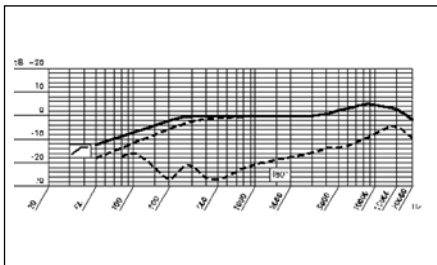

Polar Diagram

