

General Description

The WA661 and WA662 provide an easy-access, tactile feedback switch for muting lavalier and headset microphones that connect to wireless bodypack transmitters.

- For microphones with TA4F connectors
- Two-position toggle switch with tactile feedback
- Robust, reversible metal belt clip
- No electrical switch noise
- >100 dB of attenuation for mute
- Passes bias voltage to power microphones

Model Variations

The WA661 has a single output. The WA662 features two output connectors for redundant transmitter and frequency diversity applications.

Instructions for Use

Use the switch with a wireless microphone system. Connect the microphone to the input on the switch and connect the output cable to a bodypack transmitter. For the WA662, connect each of the two output cables to a different bodypack for redundant transmitter and frequency diversity applications.

Specifications

Connector Type

Input	TA4M
Output	TA4F

Switch

Two-position toggle mute switch

Cable

56cm (22 inch), two-conductor, double-serve stranded shielding

Housing

Machined aluminum

Dimensions

39 x 92 x 28 mm (H x W x D)

Weight


	Net	Packaged
WA661	121 g (4.3 oz.)	196 g (6.9 oz.)
WA662	136 g (4.8 oz.)	211 g (7.4 oz.)



WA661



WA662

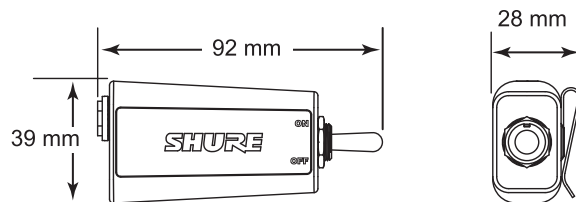

United States, Canada, Latin America, Caribbean:
 Shure Incorporated
 5800 West Touhy Avenue
 Niles, IL 60714-4608 USA
 Phone: 847-600-2000
 Fax: 847-600-1212 (USA)
 Fax: 847-600-6446
 Email: info@shure.com

Europe, Middle East, Africa:
 Shure Europe GmbH
 Jakob-Dieffenbacher-Str. 12,
 75031 Eppingen, Germany

Phone: 49-7262-92490
 Fax: 49-7262-9249114
 Email: info@shure.de

Asia, Pacific:
 Shure Asia Limited
 22/F, 625 King's Road
 North Point, Island East
 Hong Kong

Phone: 852-2893-4290
 Fax: 852-2893-4055
 Email: info@shure.com.hk