




SUMMARY SHEET OF PRE-ASSEMBLED 8" LOUDSPEAKER/TRANSFORMER/BAFFLE PACKAGES

Series
D/G, FD/HD,
SV/EZSV,
HV/EZHV, WD

ONE

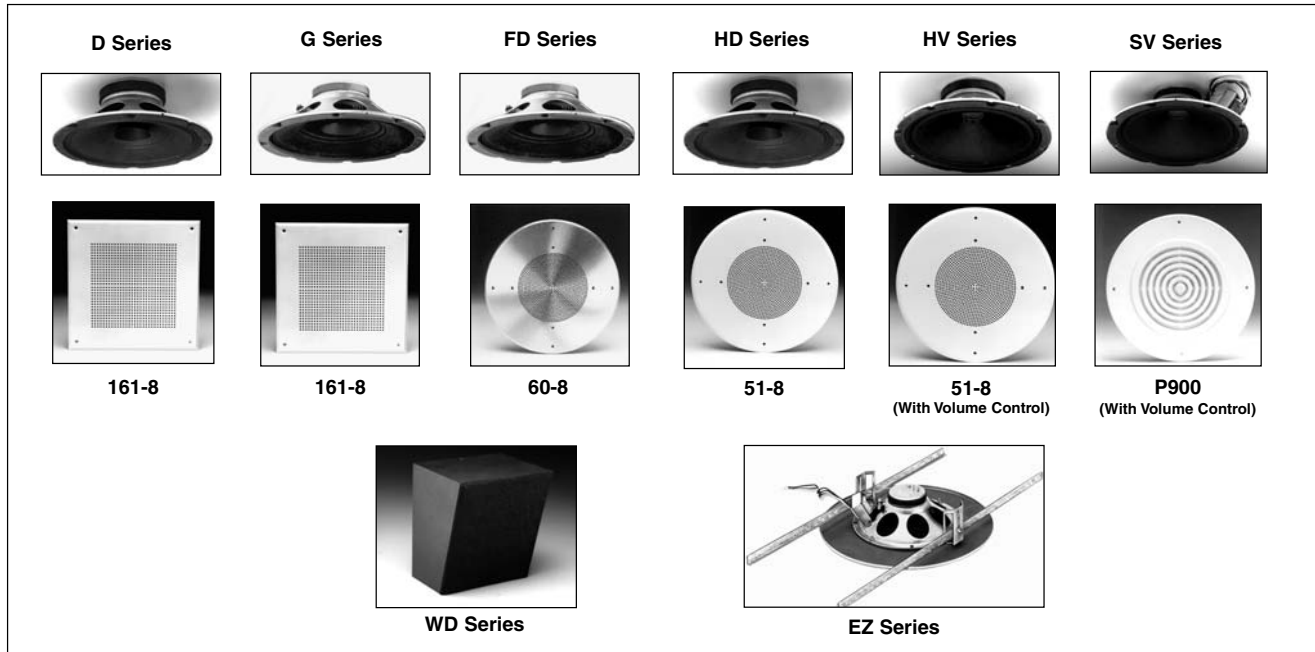

FEATURES

- Factory-Assembled Loudspeaker Packages Reduce Installation Time and Expense
- Choice of Transformers
- Recessed and Surface Models with Volume Control are Dual Adjustable to Meet Both Knob and Screw Applications
- Convenience of Models Equipped with the Patented EZ Mount Installation System

SPEAKER SPECIFICATIONS	D ★ SERIES	G ★ SERIES	FD / EZFD SERIES	HD / EZHD SERIES	HV / EZHV SERIES	SV / EZSV SERIES	WD SERIES
SIZE	8" (203mm)		8" (203mm)		8" (203mm)		
SPEAKER MODEL	C10A	C5A	FD	C10A	C10LWA	FD	FD
MAGNET WEIGHT	10 oz.(283g)	5 oz.(142g)	5 oz.(142g)	10 oz.(283g)			
MAGNET MATERIAL	Ceramic		Ceramic				
V.C. DIAMETER	1" (25mm)		1" (25mm)				
V.C. IMPEDANCE	8 Ohms		8 Ohms				
FLUX DENSITY	10,600 Gauss	9,200 Gauss	9,200 Gauss	10,600 Gauss	Similar to HD with volume control, no whizzer	Similar to FD with volume control, no option	Similar to FD with wall mount baffle, volume control
SENSITIVITY (1W, 1M)*	97dB	96dB	96dB	97dB			
WATTS (PROGRAM)	25	15	15	25			
RESPONSE**	45 Hz-19kHz	50 Hz-18 kHz	50 Hz-18 kHz	45 Hz-19 kHz			
DEPTH	3" (76mm)	2 1/16" (68mm)	2 1/16" (68mm)	3" (76mm)			
TRANS. VOLTS	25/70.7V		70.7, 25, 25/70.7V, or 100V		70.7, 25, or 25/70.7V		
CORE SIZE	1/2" x 5/8" (13 x 16mm)		1/2" x 5/8" (13 x 16mm)***whizzer				
PRI. TAPS	C, 1/2, 1, 2, 4		C, 1/2, 1, 2, 5 or C, 1/2, 1, 2, 4				
Baffle SELECTION	161-8		(T)51-8, 60-8, M222W, T62-8		51-8	51-8, 60-8, P900	417-8WD
FOR ADDL. INFO. REFER TO NOTED SPEC SHEET	SL1-1406		SL1-1035		SL1-1035	SL1-1534	SL1-1341

*Peak, 1W / 1M; **Measured in infinite baffle; ***FD/EZFD Series 100-volt version has a core size of 3/8" x 5/8".



General signaling (1480 non-fire) when used in combination with an Atlas Sound UL listed enclosure.

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

AtlasSound.com

39

HOW TO ORDER All packages include factory assembled loudspeaker, baffle, transformer and volume control where noted.

D SERIES / G SERIES						
D SERIES MODEL	G SERIES MODEL	BAFFLE	XFMR	STD PACK	RECOMMENDED (ORDER SEPARATELY)	ENCLOSURE RECOMMENDED MTG RING/ T-BAR BRIDGE (ORDER SEPARATELY)
D161-8	G161-8	161-8	25/70.7V	6	198 Series, SE175-4	72-8, 72-8E1, 72-8E2/ 81-8S

FD / HD / EZFD / EZHD SERIES				MOUNTS (ORDER SEPARATELY)
MODEL	BAFFLE	TRANSFORMER	STD. PACK	
FD25W	51-8	25V	6	<p>All Models Except TFD and THD Series Mount: ENCLOSURES: (EZ)95 Series, (EZ)96 Series, 199-8, Q408, CS95-8(NS) MOUNTING RINGS: 75-8, 75-8E1(E2), 76-8, 76-8E1(E2) P77-8, P78-8 T-BAR BRIDGE: 81-8R(S)</p> <p>TFD and THD Series Mount: ENCLOSURES: T95-8 Series, BMT95-8(-7), EZ95-8 MOUNTING RINGS: T75-8(E1)(E2) T-BAR BRIDGE: 81-8S</p>
FD70W	51-8	70.7V	6	
FD72W	51-8	25/70.7V	6	
TFD72WC	T62-8	25/70.7V	6	
FD72M222W	M222W	25/70.7V	6	
HD25W	51-8	25V	6	
HD70W	51-8	70.7V	6	
HD72W	51-8	25/70.7V	6	
THD72WC	T62-8	25/70.7V	6	
*EZFD70W	T51-8	70.7V	6	
*EZFD72W	T51-8	25/70.7V	6	
*EZHD70W	T51-8	70.7V	6	
*EZHD72W	T51-8	25/70.7V	6	

WD SERIES				
MODEL	BAFFLE / ENCLOSURE	TRANSFORMER	VOLUME CONTROL	STD. PACK
WD417-72	417-8WD	25/70.7V	N.A.	2
WD417-72V		25/70.7V	50 ohm Pot.	2
WD417-25		25V	-	2

SV SERIES / HV SERIES						
SV / EZSV MODELS	HV / EZHV MODELS	BAFFLE	TRANSFORMER	STD. PACK	VOLUME CONTROL	MOUNTS TO (ORDER SEPARATELY)
*EZSV1-2	NA	T51-8	25V	6	50-Ohm Pot. Adjusts with Removable Low-Profile Knob and/or Screwdriver	Will not accept an enclosure**
*EZSV1-7	*EZHV1-7	T51-8	70.7V	6		
*EZSV1-72	*EZHV1-72	T51-8	25/70.7V	6		

*Atlas Sound's patented quick mount installation system. ** For installations that require a backbox, see EZ Mount enclosure system.

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
 TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

AtlasSound.com