




## SlimPAR Pro W USB

SlimPAR Pro W USB is a low-profile, variable white LED washlight featuring cool white, warm white, and amber LEDs. The fixture's adjustable color temperatures can match existing lighting in addition to providing the perfect temperature for video. Its flicker-free operation also makes it well-suited for on camera use. [D-Fi USB](#) compatibility provides wireless master/slave or DMX control. Achieve smooth LED fading with built-in dimming curves that simulate halogen filaments. Fits best in the [CHS-30 VIP Gear Bag](#).

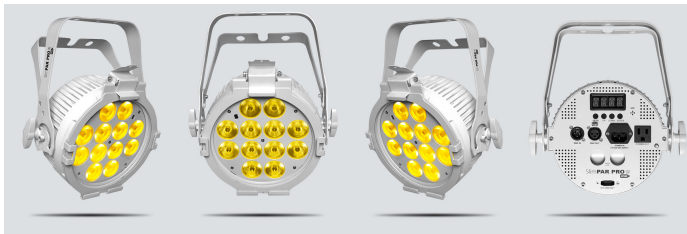

# Highlights

- Low-profile, variable white LED Par designed for any application in need of adjustable color temperatures featuring tri-color (cool white, warm white, and amber) LEDs
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- Compatible with most 7.5" Barndoors for added light control
- Suitable for every event with either black or white housing
- Match existing lighting or tune to the perfect temperature for video using variable color temperature
- Ideal for quiet applications due to silent operation and no moving parts
- Flicker-free operation suitable for on-camera use
- Achieve smooth LED fading with built-in dimming curves that simulate halogen filaments
- Easily control static colors and automated programs with the optional IRC-6 remote
- Save time running cables and extension cords by power linking multiple units
- Trigger eye-catching effects with built-in automated programs via Master/Slave or DMX mode
- Fits best in the CHS-30 VIP Gear Bag

## Specifications

- DMX Channels: 3, 4 or 9
- DMX Connectors: 3-pin XLR
- Light Source: 12 (tri-color CW,WW,A) 6 W ( 1.4 A), 50,000 hours life expectancy
- Strobe Rate: 0 to 31 Hz
- PWM Frequency: 1.2 kHz
- Beam Angle: 17°
- Field Angle: 33°
- Illuminance: 3,097 lux @ 2 m
- Power Linking: 9 units @ 120 V; 17 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 59 W, 0.9 A @ 120 V, 60 Hz 58 W, 0.5 A @ 230 V, 50 Hz
- Weight: 7 lb (3.2 kg)
- Size: 10 x 3.9 x 11.4 in (253 x 98 x 290 mm)
- Approvals: CE, MET
- Optional Controllers: IRC-6, D-Fi USB

## What's Included

- Power cord
- Gel Frame
- Gel Frame Holder
- Warranty card
- Quick Reference Guide