


OYB15

Onyx 2 x 1 Bi-Color Aluminum LED Light

ONE SHEET

Overview

The Onyx 2 x 1 Bi-Color Aluminum LED Light is fitted with 2016 high-quality LED Lights. With an aviation-grade aluminum panel design, the Onyx has better heat ventilation. The OYB15 provides a flicker-free experience when adjusting the brightness (10-99%) and color temperature (3200K-5600K). The OYB15 can be controlled remotely with either the included remote control or DMX via the Ethernet port. Having the option of being powered either by the power adapter or two V-Mount Pro Batteries, the OYB15 can meet both your studio or field needs.

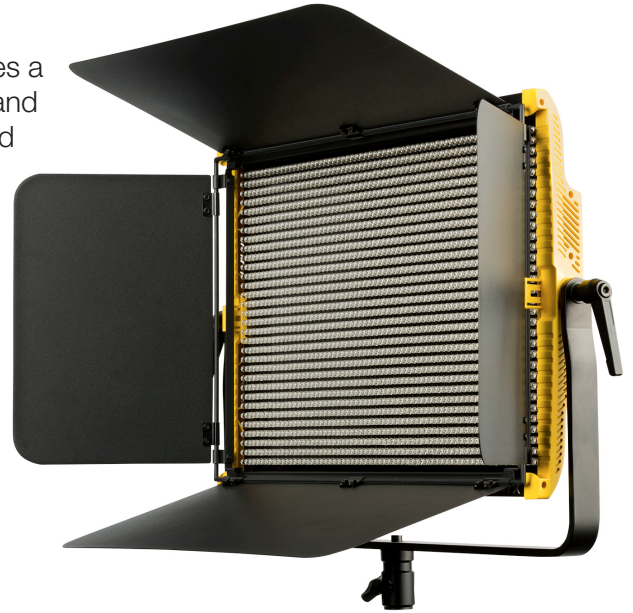

OYB10 | Onyx 1 x 1 Bi-Color Aluminum LED Light | UPC Code: 847983021895

Special Features

- Durable Lightweight Aluminum Frame
- Bi-Color Adjustable from 3200K-5600K
- 96+ CRI LEDs
- DMX Ethernet and Wireless Remote Control
- Battery-Powered by two V-Mount Pro Batteries

Recommended For

- Field and Studio Use

 www.facebook.com/ikanseit

 www.twitter.com/ikancorp

 www.vimeo.com/ikancorp

 www.youtube.com/ikancorp

ikan

www.ikancorp.com

1.713.272.8822

sales@ikancorp.com

OYB15

Features you need, Prices you want.

Aluminum Frame

The Onyx 2 x 1 LED Light's aluminum body gives it a perfect balance of being both durable and lightweight. The light fixture gives off minimal heat due to the aluminum frame which allows for excellent ventilation.

96+ CRI LED

With 2,016 96+ CRI LEDs, the Onyx OYB15 Light provides incredible color rendition and brightness. The Onyx OYB15 LED Light features a bi-color adjustable range between 3200K-5600K.

Remote Controlled

With the remote control, you can easily control lights up to 150 feet away. Also, multiple lights can be set together to all be controlled by pressing a button. DMX control is also available through the Ethernet ports.

Battery Powered

The Onyx 2 x 1 Bi-Color 3200K-5600K Aluminum LED Light light can be powered either by the included AC Power supply or two V-Mount Pro Batteries.

What's Included

- 1 x Barn Doors
- 1 x Light Bag
- 1 x OYB15 Light Fixture
- 1 x Power Adapter
- 1 x Power Cord
- 1 x Remote Control
- 1 x Yoke

Specifications

| | |
|-------------------|-----------------------------|
| Battery Type | V-Mount Pro Battery |
| Color Temperature | 3200K-5600K |
| Dimming | 10%-99% |
| DMX Standard | DMX512 (Ethernet Interface) |
| Fixture Size | 22 x 16 x 1.75 In. |
| Fixture Weight | 7.5 lbs |
| Remote Control | 99 Channels 2.4G |

Shipping Specifications

| | |
|---------------------|---------------------|
| Shipping Dimensions | 24.4 x 17.7 x 6 In. |
| Shipping Weight | 19 lbs |

Optional Accessories

| | |
|---------------------|--|
| CP-STND-V3 | Compact Light Stand Version 3 |
| HD-STND-V2 | Heavy Duty Light Stand |
| KCP-703 | Stage Clamp w/ 16mm Stud |
| ROLLR-STND10 | 2-Stage Roller Stand 10ft 6in |
| SW-04 | Safety Cable Wire 32" |
| IB-L130S | V-Mount Professional Battery |
| IB-LD295S | V-Mount Li-Ion Battery with LCD Display & Battery Status |

