



Middle Atlantic Products, Inc.

www.middleatlantic.com


Vent Panels



VT Series

- Highest percent of open area (68%)
- 16-gauge perforated steel
- Flanged for strength
- Available in 1 though 4 rackspaces
- Durable black powder coat finish

* see chart for size information

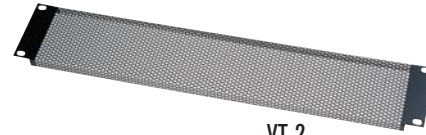

VT-2

VTF Series

- Tight perforated pattern limits view
- 16-gauge perforated steel
- Flanged for strength
- Available in 1 through 4 rackspaces
- Durable black powder coat finish

* see chart for size information



VTF-2

VTP Series

- Highest aesthetics
- 16-gauge aluminum
- Flanged for strength
- Available in 1 through 3 rackspaces
- Black brushed and anodized or silver brushed and anodized finish

* see chart for size information



CVTP-2



VTP-2

EVT Series

- 16-gauge steel (EVT) or 16-gauge aluminum (EVTC, EVTA)
- Flanged for strength
- Available in 1 and 2 rackspaces
- Black powder coat, black brushed and anodized, or silver brushed and anodized finish


* see chart for size information



EVTC-2



EVT-2

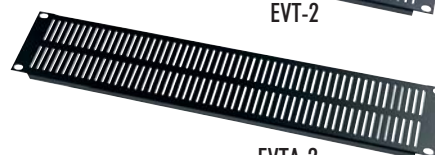

EVTA-2

electronic version available at www.middleatlantic.com

Engineered Mounting Solutions for Low Voltage Applications


US: Riverdale, NJ • Simi Valley, CA • Harvey, IL • Voice: 973-839-1011 Fax: 973-839-1976 • www.middleatlantic.com
 Canada: Ottawa, ON • Port Coquitlam, BC • Voice: 613-836-2501 Fax: 613-836-2690 • www.middleatlantic.ca

Architects' and Engineers' Specifications

EIA compliant 19" vent panels shall be Middle Atlantic Products model # ___, occupying ___ rackspaces (refer to chart). Vent panel shall be constructed of 16-gauge perforated steel (VT, VTF, EVT) or 16-gauge aluminum (CVTP, VTP, EVTC, EVTA) and shall have a ___ finish (refer to chart).

- VT perforation pattern shall be:
5/32" dia. hole, with 3/16" staggered centers
Open Area 63%
- VTF perforation pattern shall be:
1/16" dia. hole, with 1/8" staggered centers
Open Area 23%
- VTP slot pattern shall be:
0.075" x 3.125" obround on 0.313" centers (horiz.)
- EVT slot pattern shall be:
0.075" x 1.25" obround on 0.313" centers (vert.)

Vent Panel basic dimensions

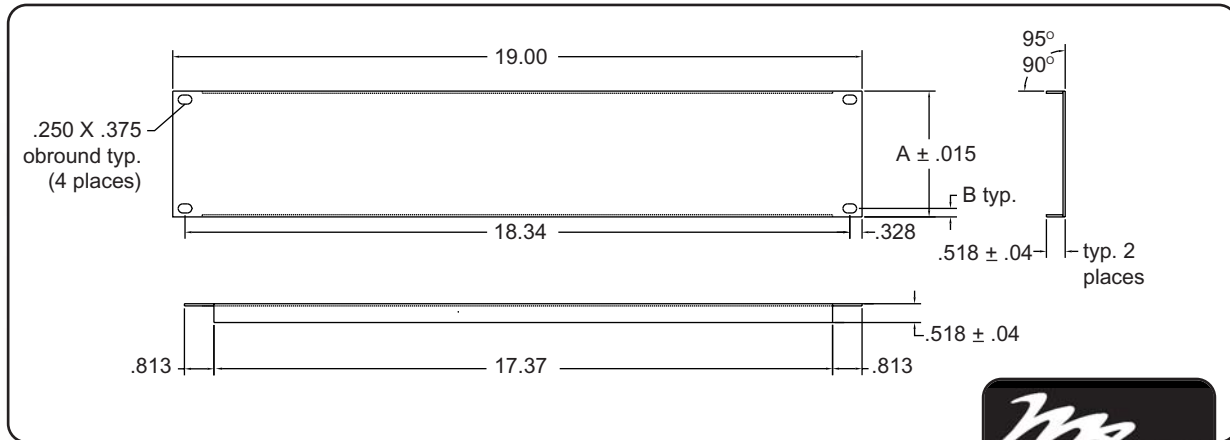

| PART # | RACKING HEIGHT | FINISH |
|--------|----------------|-----------------------------|
| CVTP-1 | 1.75 (1 space) | Silver Brushed and Anodized |
| CVTP-2 | 3.50 (2 space) | Silver Brushed and Anodized |
| CVTP-3 | 5.25 (3 space) | Silver Brushed and Anodized |
| EVT-1 | 1.75 (1 space) | Black Powder Coat |
| EVT-2 | 3.50 (2 space) | Black Powder Coat |
| EVTA-1 | 1.75 (1 space) | Black Brushed and Anodized |
| EVTA-2 | 3.50 (2 space) | Black Brushed and Anodized |
| EVTC-1 | 1.75 (1 space) | Silver Brushed and Anodized |
| EVTC-2 | 3.50 (2 space) | Silver Brushed and Anodized |
| VT-1 | 1.75 (1 space) | Black Powder Coat |
| VT-2 | 3.50 (2 space) | Black Powder Coat |
| VT-3 | 5.25 (3 space) | Black Powder Coat |
| VT-4 | 7 (4 space) | Black Powder Coat |
| VTF-1 | 1.75 (1 space) | Black Powder Coat |
| VTF-2 | 3.50 (2 space) | Black Powder Coat |
| VTF-3 | 5.25 (3 space) | Black Powder Coat |
| VTF-4 | 7 (4 space) | Black Powder Coat |
| VTP-1 | 1.75 (1 space) | Black Brushed and Anodized |
| VTP-2 | 3.50 (2 space) | Black Brushed and Anodized |
| VTP-3 | 5.25 (3 space) | Black Brushed and Anodized |