


791-44 ONE ZONE AMPLIFIED CONNECTING BLOCK

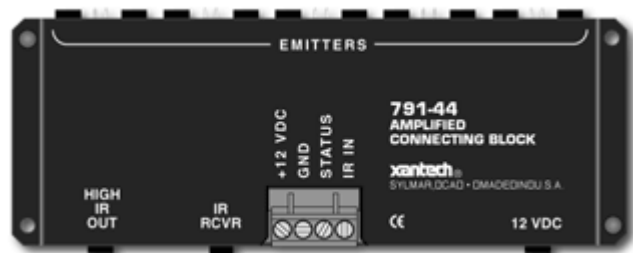

- [Back to Info by Category](#)
- [Instruction Manual](#)
- [Application Advisory](#)
- [Tech Notes/FAQ](#)
- [Printable Catalog Page](#)
- [Product Demo](#)

- Amplified version of the 790-00.
- Emitter ports with jumpers permit high or low power
- High-speed opto-isolator for improved operation.
- Quick connect stereo mini jack for Xantech IR Receivers that use a stereo mini plug.
- Parallel emitter ports drive 10 single or 10 dual emitters.
- Up to nine 790-00's can be connected to the 791-44 if more than 10 emitter ports are needed
- STATUS terminal for connection of Xantech IR Receivers and Keypads that have status indicator LED's.
- Contains red LED input signal Test-IR
- Uses either the 781RG or 782-00 power supply.
- Dimensions: 6" x 2 1/4" x 15/16" (153mm x 58mm x 24mm)