


0201 - LOUDSPEAKER, INDIVIDUAL, COAXIAL

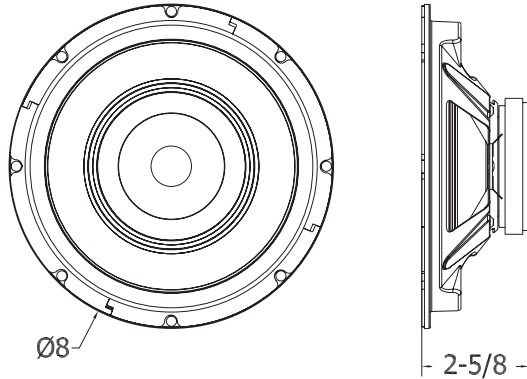

GENERAL DESCRIPTION

The Quam 8C10FEPAX is an 8" frame, 8 Ohm loudspeaker with urethane foam surround and concentric mount hard fiber HF cone. Finish: Black baked epoxy hybrid.

INTENDED USE

Wide frequency response replacement loudspeaker or combined with recommended Quam components to form a complete loudspeaker system; indoor environment.

Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

N/A

RECOMMENDED ADDITIONAL QUAM COMPONENTS

Refer to Section 0104.6 - Customer Specified Assembly or individual components listed below:

0502 - Transformers

0301 - Baffles, Round
OR
0302 - Baffles, Square

0401.1 - Flush Mounted Back Boxes, Round
OR
0401.2 - Flush Mounted Back Boxes, Square

0402 - Loudspeaker Mounting Devices

AUDIO SPECIFICATIONS

Speaker Size	8" Frame
Average Sensitivity	97 dB SPL, 1W / 1M
Power Rating	20W RMS, EIA 426A Standard
Calculated Output	110 dB SPL, 20W / 1M
Magnet Type, Weight	BaFe Ceramic, 10 oz Nomimal
Frequency Response	40 Hz - 18 kHz EIA 426A Standard
Nominal Coverage Angle	100° Included Angle, -6 dB / 2 kHz, Half Space
Mounting	4x 3/8" Holes Spaced 90° Apart On 7-5/8" Circle
Audio Connection	1/4" Spade Lug, Red is Positive

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at www.quamspeakers.com

02
LOUDSPEAKERS, INDIVIDUAL

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
 Phone (800) NEED NOW Fax (888) NEED NOW
 (800) 633-3669 (888) 633-3669
 E-Mail: neednow@qnc.com www.quamspeakers.com

