

CLOCKAUDIO

C006E
BOUNDARY
LAYER
PROFESSIONAL
MICROPHONE

MINI MIC

Small, light, sensitive and designed for a wide range of Pro Audio applications including conference, lectern and theatre.



- Boundary layer condenser microphone
- Half Cardioid Polar Pattern
- Low profile
- Stone Grey Nextel finish



PROFESSIONAL
MICROPHONE
SYSTEMS

CLOCKAUDIO

C006E BOUNDARY LAYER PROFESSIONAL MICROPHONE

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Half Cardioid
FREQUENCY RESPONSE	50 Hz - 18 KHz
SENSITIVITY	-48 dB +/- 3 dB @ 1 KHz (0 dB = 1 V/Pa)
IMPEDANCE	200 Ohms
S/N RATIO	64 dB(A)
MAXIMUM SPL	120 dB 1% THD
POWER REQUIREMENTS	9 - 48 volts phantom power
SWITCHABLE BASS FILTER	-4 dB per octave at 400 Hz to -6 dB per octave at 100 Hz
SWITCHABLE PAD	-10 dB
CABLE	10 ft (3 metres)
TERMINATION	XLR
DIMENSIONS	1.5" x 0.6" (39mm x 16.4mm)
FINISH	Stone Grey Nextel

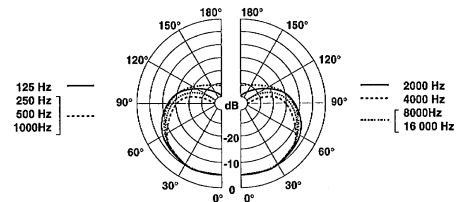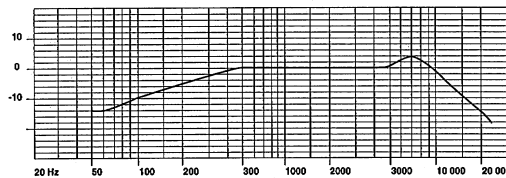

CLOCKAUDIO

Clockaudio Limited

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN

Tel: +44 (0)23 9225 1193 • Fax: +44 (0)23 9225 1201

E-mail: sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk

Clockaudio North America

18 Peladeau, N.D. Ile Perrot, Quebec, Canada J7V 7P2

Tel: (514) 453-1838 • Fax: (514) 323-3773

E-mail: info@clockaudio.com www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.