INDIVIDUAL LOUDSPEAKERS



PAGING HORN

Compression Type, Double Re-Entrant Horn Loudspeaker, 16W-25/70V Rotary Select Transformer

GENERAL DESCRIPTION

The QH16T is a compression type, double re-entrant horn loudspeaker with an integrated 16W-25/70V rotary select transformer and an adjustable mounting base. Tan, enamel finish.

INTENDED USE - Indoor or Protected Outdoor Environment

Program Material | Signal Tones, and Voice **Installation** Horizontal or Vertical Alignment

AUDIO SPECIFICATIONS

Speaker Type Average Sensitivity Frequency Response **Nominal Coverage Angle Audio Connection** Transformer

Compression, Double Re-Entrant Horn 110 dB SPL, 1W/ 1M Loudspeaker Power Rating | 16W RMS, EIA 426A Standard Calculated Output | 121 dB SPL, 16W/ 1M

450 Hz - 15 kHz EIA 426A Standard 110° Included Angle, -6 dB / 2 kHz, Half space


Screw Terminals

25/70V 16W-5 Tap, Rotary Select (16W, 8W, 4W, 2W, 1W)

RECOMMENDED QUAM COMPONENTS

KIT# 104 Three (3) Conduit Entry Plates



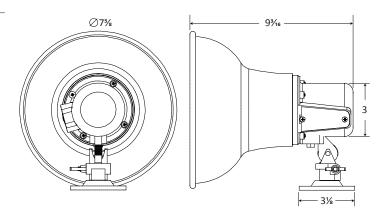

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the Specs and Diagrams section at: www.QuamSpeakers.com

© 2016 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC. 234 East Marquette Road. Chicago, IL. 60637 t: 1-800-NEED-NOW (800-633-3669) f: 1-888-NEED-NOW (888-633-3669) e: NeedNow@QNC.com www.QuamSpeakers.com