

CLOCKAUDIO

C3SE SUSPENDED CARDIOID CONDENSER MICROPHONE

Wideband cardioid condenser microphone designed to be suspended in places of worship, conference halls, theatres etc.



- Response optimised for consistent sound quality
- Slimline design
- Engineered in high quality brass
- Strong lightweight cable
- Fully balanced and terminated in male 3 pin XLR
- Short flexible shaft
- Knuckle for easy adjustment of vertical angle
- Finished in satin black or white
- Ceiling mount available as optional extra

PROFESSIONAL
MICROPHONE
SYSTEMS



CLOCKAUDIO

C3SE SUSPENDED CARDIOID CONDENSER MICROPHONE



CP73 CEILING PLATE

Diameter 3" (74mm)
Height 0.6" (14mm)
fitted with locking cable gland

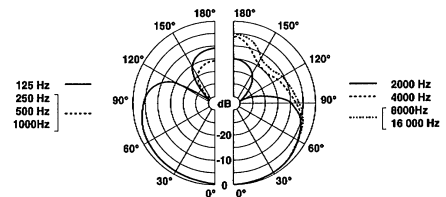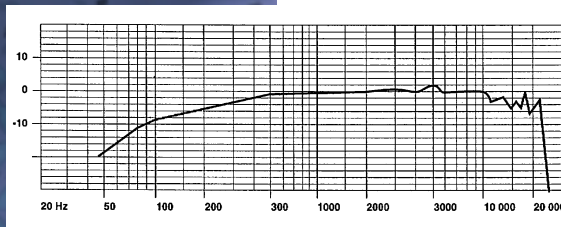

SPECIFICATIONS

TYPE	Condenser (back electret)
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	50 Hz - 18 KHz
SENSITIVITY	-47dB +/- 3dB @ 1 KHz (0 dB = 1 V/Pa)
IMPEDANCE	200 Ohms
S/N RATIO	64 dB(A)
MAXIMUM SPL	125 dB 1% THD
POWER REQUIREMENTS	9 - 48 volts phantom power
SWITCHABLE BASS FILTER	- 4 dB per octave at 400 Hz to - 6 dB per octave at 100 Hz
SWITCHABLE PAD	- 10 dB
CABLE	25 ft (7.5 metre)
TERMINATION	Male 3 Pin XLR
DIMENSIONS	0.5" (12mm) Head, 0.25" (6mm) Flexible shaft
FINISH	Satin Black/White
PACKING	14.4" x 1.6" x 1.5" (360mm x 40mm x 38mm)
NETT/SHIPPING WEIGHT	7.2/8.3 oz (206/238 grms)
ACCESSORIES	W2 foam windshield included

CLOCKAUDIO

Clockaudio Limited

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN

Tel: +44 (0)23 9225 1193 • Fax: +44 (0)23 9225 1201

E-mail: sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk

Clockaudio North America

18 Peladeau, N.D. Ile Perrot, Quebec, Canada J7V 7P2

Tel: (514) 453-1838 • Fax: (514) 323-3773

E-mail: info@clockaudio.com www.clockaudio.com

PROFESSIONAL
MICROPHONE
SYSTEMS

As part of a continuous product improvement programme, we reserve the right to alter specifications without prior notice.