

Technical Data


AudioBeam Master

Modulation	wideband AM
Carrier frequency	40 kHz
Amplitude limiting	limiter amplifier
Audio channels	1
Audio input	balanced XLR-3F socket, contacts electrically isolated
Input sensitivity	6 dBm (1.55 V) or -14 dBm (150 mV)
Impedance	600 Ω
Sound pressure level	75 dB ± 5 dB
Audio output	1 x BNC, 50 Ω short-circuit-proof
Amplifier output	approx. 90 W
Power supply	switched mode power supply 110 – 240 V, 50 – 60 Hz max. 100 W
Dimensions	264 x 82 x 320 mm
Weight	approx. 3.1 kg (6.8 lbs)

Accessories

You can obtain the following accessories from your specialist dealer:

GZP 10	Mounting plate for wall and ceiling mounting
GZG 1029	Swivel joint for aligning the AudioBeam, to be used with a stand or the GZP 10 mounting plate. Includes thread adaptor from 1/4" to 3/8"
MZT 14	Screw mounting for attaching flexible necks and swivel joints with 3/8" thread to tabletops
MZT 100	Table stand for easy installation at table height
MZT 1019	Mounting bar for two AudioBeam units with 3/8" internal thread
SEMS 3134	Stand with 3/8" thread
UK mains cable	
European mains cable	
Thread adaptor	

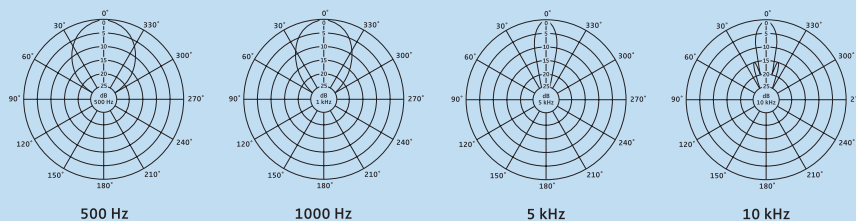

Directivity – AudioBeam polar patterns