


6 Specifications



Type:	pre-polarized condenser microphone
Polar pattern:	cardioid
Frequency range:	60 Hz to 20,000 Hz
Sensitivity at 1 kHz:	5 mV/Pa (-46 dBV re 1 V/Pa)
Impedance:	≤ 200 ohms
Recommended load impedance:	≥ 2000 ohms
Max. SPL for 1%/3% THD:	130/132 dB SPL
Equivalent noise level:	31 dB(A) to DIN 45412
Power requirement:	B 29 L battery power supply, MPA V L phantom adapter, AKG WMS bodypack transmitters
Cable length / Connector:	1.5 m (5 ft.) / 3-pin mini XLR
Finish:	matte black
Size (microphone only):	length: 200 mm (7.9 in.) max. width: 47 mm (1.9 in.)
Net weight (microphone and cable):	C 518 M: 220 g (7.8 oz.) C 518 ML: 110 g (3.9 oz.)
Shipping weight:	C 518 M: 450 g (15.9 oz.) C 518 ML: 330 g (11.7 oz.)

This product conforms to the standards listed in the Declaration of Conformity. To order a free copy of the Declaration of Conformity, visit <http://www.akg.com> or contact sales@akg.com.

Frequency Response

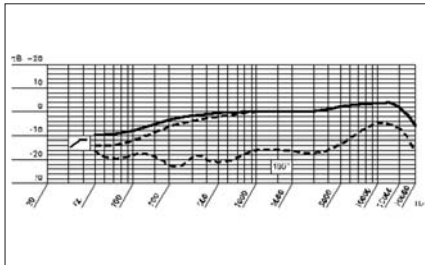

Polar Diagram

