



PRODUCTS

[HOME](#)

[PRODUCTS](#)


[NEWS](#)

[DOWNLOADS](#)

[ABOUT ASHLY](#)

[CONTACT](#)

TRA Series 2150 Two-channel, 150W/ch @ 4 ohms, 70V and 100V

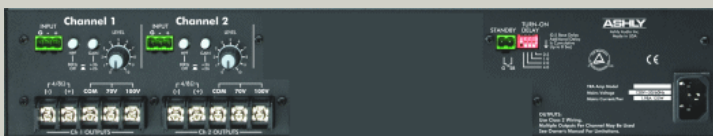

Specifications

	TRA 2075	TRA 2150	TRA 4075	TRA 4150
Signal to Noise (20 Hz-20 kHz, unweighted)	>98 dB	>98 dB	>105 dB	>105 dB
Power Consumption (Pink Noise @ 4 Ohm)				
1/8th Output	18.75W	37.5W	37.5W	75.0W
1/8th Draw	39.0W	74.0W	64.0W	125W
1/8th Current	0.69A	1.24A	1.10A	1.98A
Idle Power	17.0W	30.0W	20.0W	36.0W
Idle Current	0.30A	0.52A	0.35A	0.62A

Output Circuitry: Class D
 Input Sensitivity: 26dBu, 36dBu (selectable)
 Frequency Response: 20 Hz - 20 kHz, +/- 1.0 dB
 Damping Factor: - 8 ohm load, > 200
 Input Impedance: 20 k ohms, balanced
 Maximum Input Level: +21 dBu
 Cooling: Convection
 Front Panel Indicators (Signal per channel): -24dB, -18dB, -12dB, -6dB, -3dB, Clip
 Front Panel Indicators: overall power, standby, protect
 Attenuators: Per channel rear panel
 Input Connectors: each channel 3- Pin Euroblock
 Output connectors: each channel Screw terminals
 Amplifier Protection: Output Overcurrent, DC Output, Main Supply Rail Overvoltage, Chassis Temperature, Inrush Limiting, Mains Fuse

Power Cable Connector: 3-Prong IEC

Dimensions 19" x 1.75" x 11" (All)

Weights	TRA 2075	TRA 4075	TRA 2150	TRA 4150
Net	19.5 lbs	29.5 lbs	19.5 lbs	29.5 lbs
Shipping	25.5 lbs	35.5 lbs	25.5 lbs	35.5 lbs

©2008 Ashly Audio, Inc.
 Ashly Audio, Inc. 847 Holt Road, Webster, NY 14580-9103 • Tel: 585.872.0010 • Toll Free: 800.828.6308 • Fax: 585.872.0739

- [TRA Series Manual](#)
- [TRA Series Brochure](#)
- [TRA Series Data Sheet](#)
- [High Resolution Photo \(front\)](#)
- [High Resolution Photo \(back\)](#)
- [Accessories](#)

TRA-2075
 Two-channel, 75W/ch @ 4 ohms, 70V, 100V



TRA-2150
 Two-channel, 150W/ch @ 4 ohms, 70V, 100V



TRA-4075
 Four-channel, 75W/ch @ 4 ohms, 70V, 100V



TRA-4150
 Four-channel, 150W/ch @ 4 ohms, 70V, 100V

