


CLOCKAUDIO®






- Immuned to RF artefacts
- Engineered in high quality Brass
- Omnidirectional or Cardioid Polar Pattern
- Wide smooth response
- Balanced output
- Simple through-desk shock mounting
- Low profile at surface level
- Finished in Satin Black or Matt White

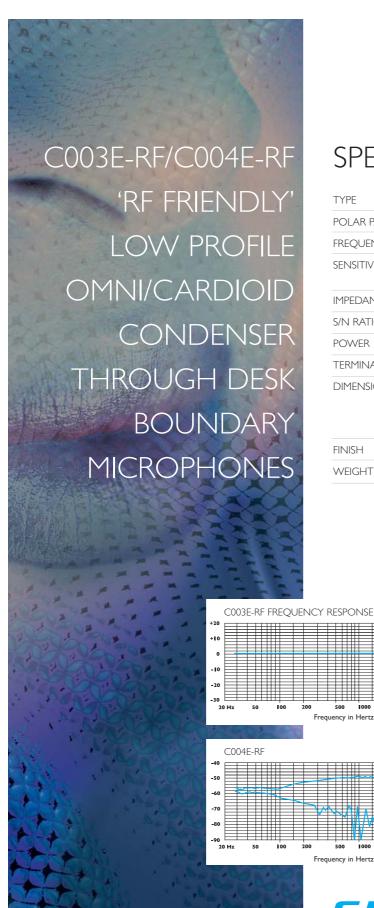



Supplied by:

SPECIFICATIONS

TYPE	C003E-RF Condenser (Back Electret)	C004E-RF Condenser (Back Electret)
POLAR PATTERN	Omnidirectional	Cardioid
FREQUENCY RESPONSE	20 Hz - 20 KHz	100 Hz - 16 KHz
SENSITIVITY	-42dB +/- 3dB @ IKHz (0dB = IV/Pa)	-47dB +/- 3dB @ IKHz (0dB = IV/Pa)
IMPEDANCE	200 Ohms	200 Ohms
S/N RATIO	58dB(A)	60dB(A)
POWER REQUIREMENTS	9 - 48 volts phantom power	9 - 48 volts phantom power
TERMINATION	Male 3 pin XLR	Male 3 pin XLR
DIMENSIONS	Overall length 90.5mm (3.6") Mount Diameter 23.5mm (.92") Visible Height 15mm (.59") Head Diameter 31mm (1.22")	Overall length 90.5mm (3.6") Mount Diameter 23.5mm (.92" Visible Height 22mm (.87") Head Diameter 31mm (1.22")
FINISH	Satin Black or Matt White	Satin Black or Matt White
WEIGHT	113 g (4oz)	103 g (3.6oz)







CLOCKAUDIO

Clockaudio Ltd - Headquarters

22 Arnside Road, Waterlooville, Hampshire PO7 7UP. UK Tel +44 (0)23 9225 | 193 • Fax +44 (0)23 9225 | 201 e-mail sales@clockaudio.co.uk

Clockaudio North America Inc.

2891 du Meunier, Unit 103, Vaudreuil-Dorion, Quebec J7V 8P2. Canada Tel: (450) 424-9797 • Fax: (450) 424-3660

e-mail: info@clockaudio.com

www.clockaudio.com