

CLOCKAUDIO®

C011E-RF/C012E-RF
'RF FRIENDLY'
LOW PROFILE
OMNI/CARDIOID
CONDENSER
THROUGH DESK
BOUNDARY
LAYER
MICROPHONES







- Immune to RF artifacts
- Omni-directional or Cardioid
- Wide smooth response
- Balanced output
- Simple through desk shock mount
- Engineered in high quality brass
- Low profile at surface level
- Finished in satin black or nickel

PROFESSIONAL
MICROPHONE
SYSTEMS

C011E-RF/C012E-RF 'RF FRIENDLY' LOW PROFILE OMNI/CARDIOID CONDENSER THROUGH DESK BOUNDARY LAYER MICROPHONES

SPECIFICATIONS

	C011E-RF	C012E-RF
TYPE	Condenser (Back Electret)	Condenser (Back Electret)
POLAR PATTERN	Omni-directional (Beyond boundary)	Cardioid Cardioid (Beyond boundary)
FREQUENCY RESPONSE	50Hz - 20KHz	50Hz - 18KHz
SENSITIVITY	-42dB \pm 3dB @ 1KHz (0dB = 1VPa)	-47dB \pm 3dB @ 1KHz (0dB = 1VPa)
IMPEDANCE	200 Ohms	200 Ohms
S/N RATIO	58dB (A)	60dB (A)
MAXIMUM SLP	120dB at 1KHz 1% THD	
POWER REQUIREMENTS	9 - 48 Volts Phantom Power	
TERMINATION	Male 3 Pin XLR	
FINISH	Satin Black (Other finishes to special order)	
DIMENSIONS		
Overall Length	85mm (3.35")	90mm (3.55")
Shaft Dia.	19.82mm (0.78")	19.82mm (0.78")
Head Dia.	30mm (1.18")	28mm (1.10")
Weight	112g (3.95oz)	126g (4.45oz)
SHIPPING INFORMATION		
Length	110mm (4.33")	110mm (4.33")
Width	80mm (3.15")	80mm (3.15")
Depth	40mm (1.58")	40mm (1.58")
Weight	140g (4.94oz)	152g (5.37oz)

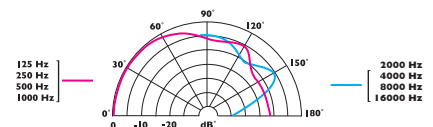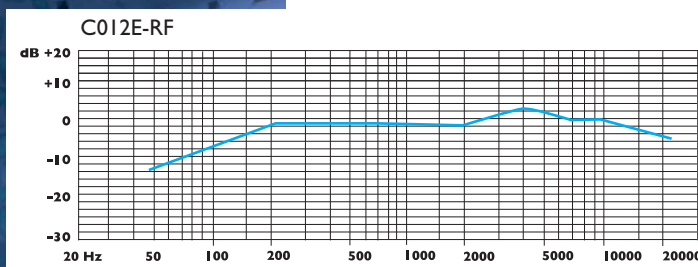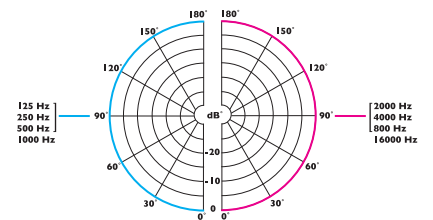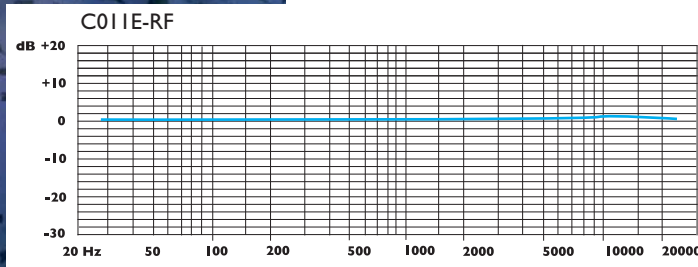

CLOCKAUDIO®

22 Arnside Road, Waterlooville, Hampshire PO7 7UP
Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
E-mail sales@clockaudio.co.uk www.clockaudio.com

Clockaudio North America

2891 du Meunier, Vaudreuil-Dorion, QC J7V 8P2, Canada
Tel: (514) 453-1838 • Fax: (514) 323-3773
E-mail: info@clockaudio.com www.clockaudio.com



PROFESSIONAL
MICROPHONE
SYSTEMS