LOCKAUD

Short flexible gooseneck Slimline unobtrusive design • Engineered in high quality brass TINI Q connector for easy interchange Cardioid condenser microphone

- C3 series wideband quality
- Easy connection to SM20 shock mount or PPA
- Finished in satin black

•



C3100

CARDIOID

SHORT GOOSENECK

MICROPHONE WITH

TINI Q CONNECTOR

Designed for use in boardrooms,

applications requiring easily

conferencing and a wide variety of


detachable gooseneck microphones

with good consistent sound quality.

ROPH



- Very low profile above surface
- TINI Q male socket shock mounted
- Integral phantom power adaptor with selectable bass roll off and 10dB pad
- Terminated in male 3 pin XLR socket
- Engineered in high quality brass

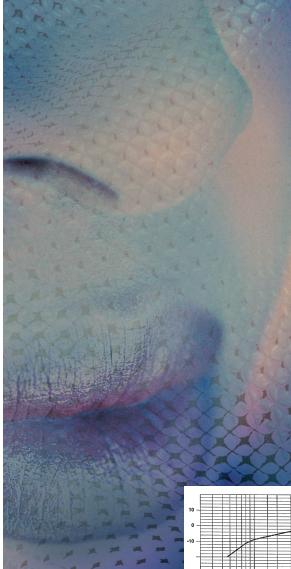





SPECIFICATIONS

C3100

ТҮРЕ	Condenser (Back Electret)
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	50Hz - 18KHz
SENSITIVITY	-47dB +/-3dB @ IKHz (0dB = IV/Pa)
IMPEDANCE	200 Ohms
s/n ratio	64dB(A)
MAXIMUM SPL	125dB 1% THD
POWER REQUIREMENTS	PPA or SM20
TERMINATION	3 pin female TINI Q connector
ACCESSORIES	W2 Windshield included
DIMENSIONS Head Diameter Shaft Diameter Overall Length	12mm (0.4 ins.) 6mm (0.2 ins.) 125mm (4.9 ins.)
FINISH	Satin Black
NETT/SHIPPING WEIGHT	29gms. (1.2 oz.) 51gms. (1.8 oz.)





SM20

- Fitted with 3 pin male TINI Q Connector
- Switchable bass cut filter -4dB per octave at 400Hz to -6dB per octave at 100Hz
- Switchable Pad I OdB
- Fully balanced output termination in 3 pin XLR
- Surface mount technology
- Engineered in high quality Brass
- Finished in Satin Black

MOUNT DIAMETER	25mm (0.9 ins.)
VISIBLE HEIGHT	3mm (0.125 ins.)
HEAD DIAMETER	19mm (1.02 ins.)
OVERALL LENGTH	90mm (3.5 ins.)
NETT/SHIPPING WEIGHT	256 gms. (9.0 oz.) 279gms. (9.8 oz.)

CLOCKAUDIO

9 Stratfield Park, Elettra Avenue, Waterlooville, Hampshire PO7 7XN Tel +44 (0)23 9225 1193 Fax +44 (0)23 9225 1201 E-mail sales@clockaudio.demon.co.uk www.clockaudio.demon.co.uk

PROFESSIONAL MICROPHONE SYSTEMS