

CLOCKAUDIO®

C008E-RF
'RF FRIENDLY'
BOUNDARY LAYER
PROFESSIONAL
MICROPHONE

Developed for speech purposes in a wide range of pro and live sound applications including conference, lecturn and theatre.





- Immune to RF artifacts
- Boundary layer condenser microphone
- Cardioid polar pattern
- Fully balanced
- High quality engineering in solid brass
- Concealed cable and fixing screw mounting
- Non-reflective stone grey nextel finish

PROFESSIONAL
MICROPHONE
SYSTEMS

C008E-RF
 'RF FRIENDLY'
 BOUNDARY LAYER
 PROFESSIONAL
 MICROPHONE

SPECIFICATIONS

TYPE	Condenser (Back Electret)
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	50Hz - 18KHz
SENSITIVITY	-47dB ± 3dB @ 1KHz (0dB = 1VPa)
IMPEDANCE	200 Ohms
S/N RATIO	64dB (A)
MAXIMUM SPL	125dB 1% THD
POWER REQUIREMENTS	9 - 48 Volts Phantom Power
CABLE	3 metres
TERMINATION	Male 3 Pin XLR
DIMENSIONS	Length 70mm (2.76") Width 22mm (0.87") Weight 508g (17.9oz)
MOUNTING	2 x M6 set screws
FINISH	Stone Grey Nextel
SHIPPING INFORMATION	Length 111mm (4.37") Width 80mm (3.15") Depth 43mm (1.69") Weight 528g (18.7oz)

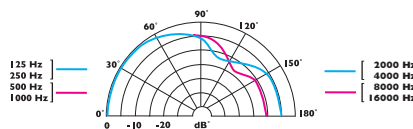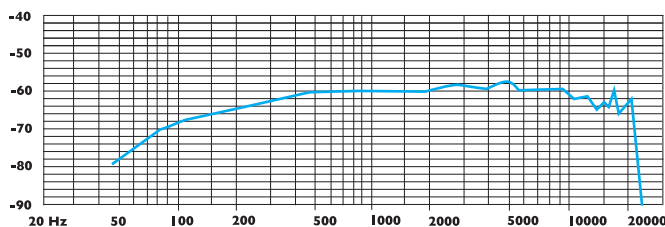

CLOCKAUDIO®

22 Arnside Road, Waterlooville, Hampshire PO7 7UP
 Tel +44 (0)23 9225 1193 • Fax +44 (0)23 9225 1201
 E-mail sales@clockaudio.co.uk www.clockaudio.com

Clockaudio North America

2891 du Meunier, Vaudreuil-Dorion, QC J7V 8P2, Canada
 Tel: (514) 453-1838 • Fax: (514) 323-3773
 E-mail: info@clockaudio.com www.clockaudio.com



PROFESSIONAL
 MICROPHONE
 SYSTEMS