



RRM-2 UPS REAR RACK EAR KIT

For rear rack mounting of MB-1500, F-1500, MB-1000 and F-1000

Parts Included in Kit:

Qty=2 Rear Rack Ear (P/N: 401-00018)

Qty=6 Screw, Machine, Pan Head, Philips, Black, 6-32 x 0.50in

Qty=6 Screw, Machine, Pan Head, Philips, Black, M3 x 10mm

Qty=6 Washer, Flat, Black, 0.50in (O.D.) x 0.14in (I.D.) x 0.045in (Thick)

Tools Required:

Screw driver – Philips Head #1

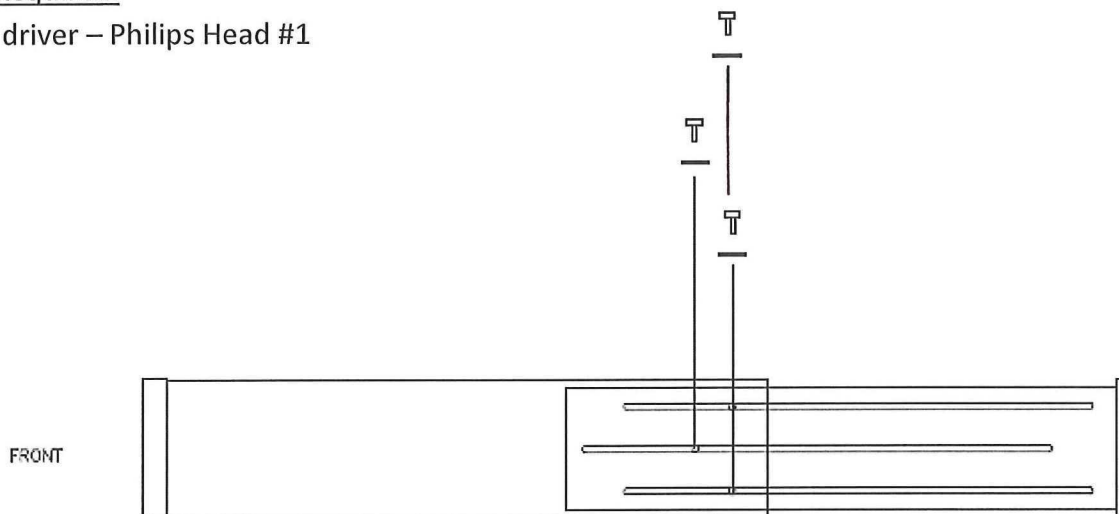


Figure 1

Installation Instructions:

- 1.) Locate the three screw holes on either side of UPS towards the back.
- 2.) Orient each Rear Rack Ear so that its slots line up with the three screw holes in the UPS. **NOTE**-Please ensure that the flange on the rear rack ear is pointing back and away from the UPS. (See Fig.1)
- 3.) Loosely install a 6-32 screw and washer through each slot in the rear rack ear and into the screw hole of the UPS. **NOTE**-If the 6-32 screw is too large for the screw holes in the **MB-1000/F-1000**, use the included M3 screws instead.
- 4.) Adjust each rear rack ear so that it extends far enough back to reach the rear rack rail of the equipment rack.
- 5.) Tighten the three screws for each rear rack ear.
- 6.) Screw flange of rear rack ears to rear rack rail of equipment rack (rack screws not included).