


# SPECIFICATIONS

## Type

Dynamic

## Frequency Response

100 to 5,000 Hz (Figure 2)

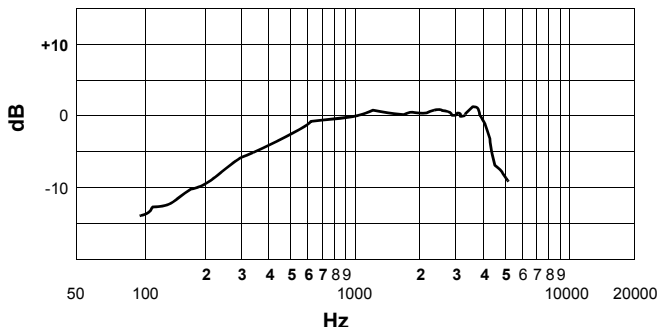

TYPICAL FREQUENCY RESPONSE

FIGURE 2

## Polar Pattern

Omnidirectional

## Impedance

High, unbalanced

## Load Impedance Range

Minimum: 100 k $\Omega$

## Output Level (at 1,000 Hz)

Open Circuit Voltage  $-38.0$  dBV/Pa (13 mV)\*

\*1 Pa = 94 dB SPL

## Polarity

Positive sound pressure on diaphragm produces positive voltage on tip with respect to sleeve (ground) of microphone output phone plug connector

## Cable

6.1 m (20 ft) two conductor shielded with standard 1/4-inch phone plug attached (supplied wired for high-impedance, unbalanced connection)

## Case

Green and chrome finished die casting

## Dimensions

63 mm (2.5 in) max diameter, 82.6 mm (3 1/4 in) long

## Net Weight (with cable)

737 grams (26 oz)