


## SPECIFICATIONS

### Frequency Response

Flat above rolloff point; -0.5 dB maximum at 1 kHz (see Figure)

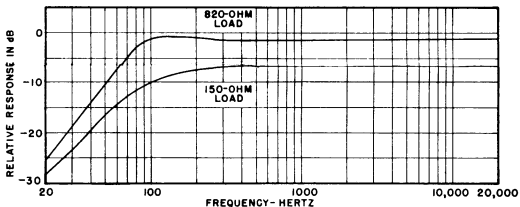

## TYPICAL FREQUENCY RESPONSE

### Impedance

Designed for 150 ohm rated microphones and inputs

### Distortion

2.5% maximum (100 mV input, open circuit output)

### Connectors

Designed to mate with Cannon XL series, Switchcraft A3 series, or equivalent

Input: 3-socket connector

Output: 3-pin connector

**CASE**

Full magnetic shield, steel with gray enamel finish

**DIMENSIONS**

19 mm (3/4 in.) diameter; 114 mm (4 1/2 in.) long

**GUARANTEE**

This Shure product is guaranteed in normal use to be free from electrical and mechanical defects for a period of two years from date of purchase. Please retain proof of purchase date. This guarantee includes all parts and labor, and is in lieu of any and all other guarantees or warranties, express or implied. There shall be no recovery for any consequential or incidental damages.

**SHIPPING INSTRUCTIONS**

Carefully repack the unit, have it insured, and return it prepaid to:

Shure Incorporated  
Attention: Service Department  
5800 W. Touhy Avenue  
Niles, Illinois 60714-4608

If outside the U.S.A, return the unit to your dealer or Authorized Shure Service Center for repair. The unit will be returned to you prepaid.