

SPECIFICATIONS

Frequency Response

20 to 20,000 Hz \pm 2 dB

Impedance

Low impedance: 600 Ω (supplied) or 150 Ω

Medium impedance: 2,500 Ω

DC Resistance

Low impedance:

600 Ω winding: 56 Ω

150 Ω winding: 28 Ω

Medium impedance:

Open Circuit

Voltage Ratio

600 Ω

150 Ω

Low impedance to medium impedance: +6 dB

+12 dB

Maximum Recommended Input Levels


<u>Source Impedance</u>	<u>Winding Being Driven</u>	<u>Maximum Level</u>
150 Ω	150 Ω	0.5 V
600 Ω	600 Ω	1.0 V
2,500 Ω	2,500 Ω	2.0 V

Case

Full magnetic shield, steel with gray enamel finish

Dimensions

19 mm (3/4 in.) diameter; 89 mm (3 1/2 in.) long

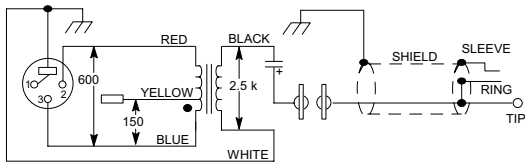

FULL TWO YEAR WARRANTY

Shure warrants this product to be free in normal use of any defects in workmanship and materials for two (2) years from the date of purchase. If your Shure product fails within this period, call 1-800-516-2525 in the United States for details on repair, replacement, or refund. This warranty does not cover abuse or misuse of the product, use contrary to Shure's instruction, ordinary wear and tear, an act of God or unauthorized repair.

SHIPPING INSTRUCTIONS

Carefully repack the unit, have it insured, and return it prepaid to:

Shure Incorporated

Attention: Service Department

5800 W. Touhy Avenue Niles, Illinois 60714-4608

If outside the U.S.A., return the unit to your dealer or Authorized Shure Service Center for repair. The unit will be returned to you prepaid.