


## SPECIFICATIONS

### Frequency Response

20 to 20,000 Hz (See Figure 2)

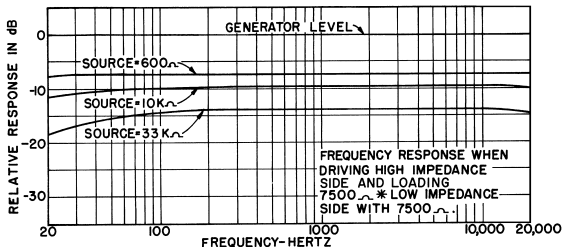

\* FOR 600Ω LOAD, WITH INTERNAL WIRING CHANGED TO 600Ω, ABOVE CURVES APPLY BUT ALL LEVELS WILL BE APPROXIMATELY 11 dB LOWER.

TYPICAL FREQUENCY RESPONSE  
FIGURE 2

### Impedance

XLR Pin Connector (M):	7500Ω or 600Ω
XLR Socket Connector (F):	33,000Ω

### Voltage Ratio

	<u>7500 Ω</u>	<u>600 Ω</u>
Medium-impedance to high-impedance:	+6.4 dB	+17.4 dB
High-impedance to medium-impedance:	-6.4 dB	-17.4 dB

## Maximum Recommended Input Levels


<u>Driving Source Impedance (ohms)</u>	<u>Winding Being Driven (ohms)</u>	<u>Maximum Level (Volts)</u>
600	600	0.5
600	7500	2.5
600	33,000	6.0
7500	7500	1.5
7500	33,000	5.0
33,000	33,000	5.0

## Case

Full magnetic shield, steel with gray enamel finish

## Dimensions

19 mm ( $3/4$  in.) diameter; 89 mm ( $3\ 1/2$  in.) long

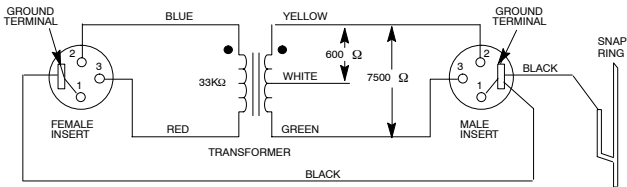

CONNECTOR WIRING DIAGRAM  
FIGURE 1

