



LO-2B



TM-1 TM-1E



US-2

VM-2



BC-1

MAC-1

CO-1B

### FEATURES

- Largest Selection of Microphone Adapters, Extensions, Fittings, and Flanges for use with Floor, Desk, Loudspeaker, and Studio Boom Stands
- U. S. Standard  $\frac{5}{8}$ "-27 Termination Accommodates All Types of Microphone Holders and Stands
- Quality Craftsmanship Assures Compatibility and Long-Lasting Performance
- Durable Design for use in Touring P.A. Applications

### CLIP-MOUNTING MICROPHONE ACCESSORIES

**LO-2B/LO-2BE.** Lock-on accessory provides for fast, convenient set-up and take-down of microphone holders and boom attachments with standard  $\frac{5}{8}$ "-27 threads. Accessory is particularly useful for outdoor touring applications where inclement weather can necessitate the quick removal of expensive microphones. Unit features a secure, snap-on fastener and durable, push-button release.  $2\frac{1}{2}$ " long. Available in chrome or ebony (E). (Net Weight: 3 oz.)

**TM-1/TM-1E.** Twin microphone mounts provide for the horizontal attachment of two or three  $\frac{5}{8}$ "-27 threaded microphones onto most stands, goosenecks and stand adapters. Units are  $8\text{-}\frac{3}{4}$ " wide and finished in chrome or ebony (E). (Net Weight: 5 oz.)

**US-2.** Flange-mounting, multi-purpose microphone support includes  $12\frac{3}{4}$ " long boom on spring loaded swivel with  $180^\circ$  vertical cable feed-thru hole ( $\frac{1}{4}$ " diameter). Accessory is ideal for attaching standard thread microphones to lecterns, consoles, control racks, and desks in classroom and laboratory facilities. Chrome finish. (Net Weight: 11 oz.)

**VM-2.** Mechanical shock-isolation accessory reduces vibration pick-up of microphones. Die-cast unit mounts between all  $\frac{5}{8}$ "-27M threaded tubes and  $\frac{5}{8}$ "-27F accessories including goosenecks, tubes, and microphone clamps. It is perfect for touring groups and working musicians.  $2\text{-}\frac{5}{8}$ " long. Chrome finish. (Net Weight: 5 oz.)

### MULTI-PURPOSE CLAMPS

**BC-1.** Bracket-style surface clamp with 6" high chrome tube attaches to tables, desks, and countertops for mounting microphone and accessory items with standard  $\frac{5}{8}$ " threads. Chrome finish. (Net Weight: 10 oz.)


**MAC-1.** Patented, multi-use adapter/clamp secures microphones, horizontal booms, or accessories with standard  $\frac{5}{8}$ "-27 threads. Versatile unit also clamp mounts to  $\frac{5}{8}$ " and  $\frac{7}{8}$ " diameter tubing or to free-standing instruments, keyboards, synthesizers, drum, and percussion instruments with tubing/mounting surface up to  $1\frac{1}{2}$ " in diameter. Unit is equipped with uniquely-engineered three-position, removable hex adapter which allows for convenient vertical or horizontal mounting. Clamp features nylon end cap to prevent marring of tube/surface finish. Fabricated from high-strength extruded aluminum and finished in ebony epoxy.  $3\frac{1}{2}$ " high. (Net Weight: 6 oz.)

**CO-1B.** Connect-on swivel adapter/clamp facilitates installation of a second microphone with standard  $\frac{5}{8}$ "-27 threads to any floor or desk stand with  $\frac{5}{8}$ " or  $\frac{7}{8}$ " dia. tubing. Adapter piece can be removed and fastened to mic mount for fast, easy set-up and take-down.  $3\frac{1}{2}$ " long. Ebony finish. (Net Weight: 3 oz.)

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A. / TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

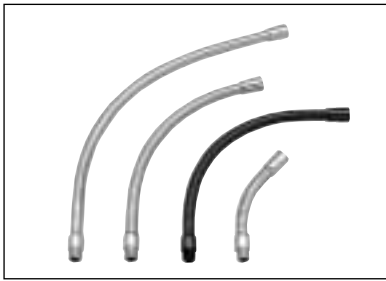

GN Series



CH-1B

AD-15B



AD-4B

AD-5B

AD-6B



AD-11B

AD-12B



AD-7BE

AD-8B

AD-14B

AD-19B



TB-58X



Replacement Kits

## GOOSENECK FLEXIBLE EXTENSIONS

**GN-6(E)/GN-13(E)/GN-19(E).** Flexible goosenecks in 6", 13", and 19" lengths, respectively, attach to any microphone stand or adapter with  $\frac{5}{8}$ "-27 male and female threads. Inside diameter is .338". Available in chrome or ebony (E) finish.

(Net Weights: GN-6(E) = 4 oz; GN-13(E) = 8 oz.; GN-19(E) = 12 oz.)

## CABLE/TAMBOURINE HANGERS AND CABLE FEED-THRU ADAPTER

**CH-1B/CH-1BE.** Versatile and unique accessory can be used to conveniently hang a tambourine or to neatly guide cabling down the tube. Single screw-mounting clamp adjusts to fit all tube assembly sizes. Available in chrome or ebony (E).

(Net Weight: 5 oz.)

**AD-15B.** Chrome 4" cable feed-thru adapter with standard  $\frac{5}{8}$ " male and female threads. (Net Weight: 2.2 oz.)

## COUPLINGS FOR USE WITH TUBE EXTENSIONS AND ACCESSORIES

<b>AD-4B</b>	$\frac{3}{4}$ " long, $\frac{5}{8}$ "-27 male running thread; brass, no plating (Net Weight: .6 oz)
<b>AD-5B</b>	$\frac{5}{8}$ "-27 female to $\frac{5}{8}$ "-27 female coupling; chrome plated (Net Weight: .6 oz.)
<b>AD-6B</b>	$\frac{7}{8}$ " female to $\frac{5}{8}$ "-27 female coupling; chrome plated (Net Weight: 2 oz.)

## SURFACE-MOUNTING FIXTURES

<b>AD-11B(E)</b>	$\frac{5}{8}$ "-27 female flange with $1\frac{1}{4}$ " base diameter; chrome or ebony (E) (Net Weight: 1 oz.)
<b>AD-12B(E)</b>	$\frac{5}{8}$ "-27 male flange with base holes on $1\frac{1}{4}$ " centers; chrome or ebony (E) (Net Weight: 1.3 oz.)

## TUBE EXTENSIONS FOR USE WITH COUPLING ADAPTERS

<b>AD-7B</b>	3" long tube with $\frac{5}{8}$ "-27 male at each end; chrome plated (Net Weight: 1.3 oz.)
<b>AD-8B</b>	6" long tube with $\frac{5}{8}$ "-27 male at each end; chrome plated (Net Weight: 2.2 oz.)
<b>AD-14B</b>	Right angle tube with $\frac{5}{8}$ "-27 male and female end; chrome plated; 4"H x 4" Ext. (Net Weight: 2.2 oz.)
<b>AD-19B</b>	45° angle tube with $\frac{5}{8}$ "-27 male and female end; chrome plated; 6"H x 3" Ext. (Net Weight: 2.2 oz.)
<b>TB-58X</b>	Adds 31" of height or length to any $\frac{5}{8}$ " tube; requires AD-5B adapter (Net Weight: 12 oz.)
<b>TB-78X</b>	Adds 31" of height or length to any $\frac{5}{8}$ " tube; requires AD-6B adapter (Net Weight: 1 lb. 2 oz.)

## REPLACEMENT KITS

For replacement kit information, please refer to Atlas Sound Replacement Part Order Guide # MS-DRG

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A. / TELEPHONE: (800) 876-3333 / FAX (800) 765-3435