


Rackmount Volume Controls

- **Rotary Knob with Adhesive Dial Scale**
- **25W, 50W, or 100W power rating**

Features

- Precise level adjustment of single or multiple speaker lines.
- Adhesive dial scale
- Easy-connect phoenix-style plug-in screw termination strips for pre-wire convenience
- Wire capacity to 14-gauge
- Power rating 25W-100W (see chart)
- 3dB step attenuation (two steps of 6dB each before off)
- ETL Listed
- Assembled in the U.S.A.

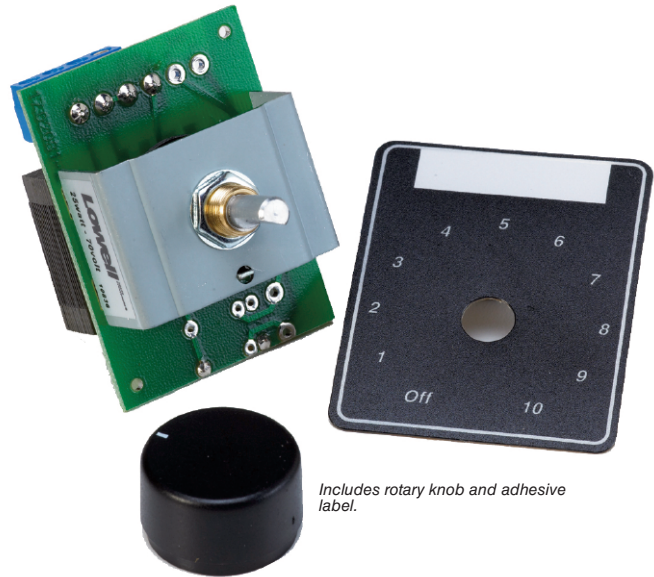

A & E Specifications

The volume control shall be Lowell Model No. _____ which shall have a power rating of _____ (25W, 50W, 100W) and attenuation of 3dB per step with two steps of 6dB each before off. It shall include a rotary knob and adhesive label with dial scale. The control shall be ETL Listed.

Optional (order separately)

- **Panel No. LVC8P-ID2:** Rackmount panel provides easy installation of multiple volume controls (LVC Series). The 19" x 2U panel includes a rear lacing flange for wire management and a clear pocket window (PocketID) to hold a half-inch paper strip for labeling the controls. Download a template from www.lowellmfg.com.



Optional rackmount panel holds up to 8 volume controls (order separately)

Model No. Summary

Model No.	Description	Power Rating	Type	Switch Type	Switch Positions	Attenuation * Step / Total	Style
25LVC-RM	Volume Control	25W	Auto-trans	Rotary	10-off	3dB / 33dB	Adhesive label
50LVC-RM	Volume Control	50W	Auto-trans	Rotary	10-off	3dB / 33dB	Adhesive label
100LVC-RM	Volume Control	100W	Auto-trans	Rotary	10-off	3dB / 33dB	Adhesive label

* Models have two steps of 6dB each before off

Wiring & Schematic

