

# Standard Earset



Also Available in Black



## Performance You Can Hear


The Mogan Standard Omni Earset Microphone offers solid performance at an unbeatable value. Featuring a 3.0 mm Omni-directional condenser capsule, it delivers high-quality audio to budget-conscious presenters. A flexible boom and earpiece enables proper positioning on one's left or right ear for best-in-class stability and comfort. It is ideal for the pulpit, classroom, and podcast studio.

Model	Color	Connector	SKU
Standard Earset	Beige	AKG	EAO-BG-AK
Standard Earset	Beige	Audio-Technica	EAO-BG-AT
Standard Earset	Beige	Sennheiser	EAO-BG-SE
Standard Earset	Beige	Shure	EAO-BG-SH
Standard Earset	Black	AKG	EAO-BK-AK
Standard Earset	Black	Audio-Technica	EAO-BK-AT
Standard Earset	Black	Sennheiser	EAO-BK-SE
Standard Earset	Black	Shure	EAO-BK-SH

### Kit Contains:

- Earset microphone
- 4 ft reinforced cable
- Foam windscreens
- Single-cable clip
- Carrying case

Capsule	Back-electret condenser
Polar Pattern	Omni-directional
Frequency Response	50 Hz to 16 kHz
Sensitivity	-44 ± 3 dB re 1 V/Pa
Equivalent Noise Level	39 dB (A-weighted)
Signal-to-Noise Ratio	60 dB
Output Impedance	2.2 K Ω ± 30%
Maximum SPL	96 dB
Operating Current	<100 mA
Power Requirement	1.5 VDC (opt), 5 VDC (max)
Overall Length	155 mm
Boom Length	110 mm
Capsule Diameter	3.0 mm
Connector Type	Compact-screw
Cable Diameter/Length	1.4 mm x 1.2 m
Weight	15 g

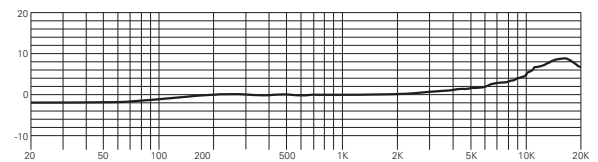

## Connectivity

Mogan's interchangeable cable system enables one to connect a single microphone to multiple wireless transmitters. Each microphone includes a cable with a hardwired connector for Shure, AKG, Sennheiser, or Audio-Technica. These cables are also available for special order.

## Limited Warranty

Mogan Microphones are warranted to be free of defects in materials and workmanship for one year. Visit [www.moganmicrophones.com](http://www.moganmicrophones.com) for details.



Shure®



AKG®



Sennheiser®



Audio-Technica®