




Quam

C5/BU/CK1/x

Clock Baffle with Speaker, 25-70.7V Transformer

0702 - CLOCK BAFFLE COMPONENTS

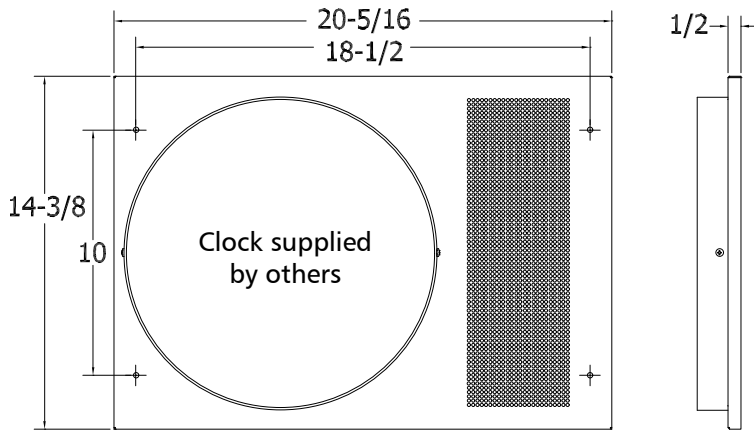

Loudspeaker Baffle shown
in 'RIGHT' position



Loudspeaker Baffle shown
in 'Down' position

GENERAL DESCRIPTION

The Quam C5/BU/CK1/x is a steel clock baffle with 8" frame loudspeaker, 25 and 70.7V universal transformer. Clock mechanism is supplied by others. Finish: White baked epoxy hybrid.

INTENDED USE

Used with listed analog repeater clock mechanisms supplied by others. Loudspeaker may be oriented up, down, left or right of the display; indoor environment. Program Material: Music, voice and signal tones

LISTED SUPPLIERS

For DuKane® system	Order as: C5/BU/CK1/D
For Sapling® system	Order as: C5/BU/CK1/S

SYSTEM COMPONENTS:

Loudspeaker	8C5PAX
Transformer	TBLU (5W, 25 and 70.7V, 5 taps at -3dB levels)

REQUIRED ADDITIONAL QUAM COMPONENT

Section 0702- Clock Baffle Components
ES8-CK Flush mount box for CK1 baffle -or-
SE9W Surface mount box for CK1 baffle

AUDIO SPECIFICATIONS

Speaker Size	8" Frame
Average Sensitivity	96 dB-SPL, 1W/1M Power Rating
Calculated Output	103 dB-SPL, 5W/1M
Frequency Response	65Hz- 17 kHz, EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB/ 2 kHz, Half Space
Audio Connection	7" Long Tinned Wires, Pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: www.quamspeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637
Phone: (800) NEED NOW Fax: (888) NEED NOW
(800) 633 - 3669 (888) 633 - 3669
E-Mail: neednow@qnc.com www.quamspeakers.com

