Thank you for your purchase of the DB14 AV PRESENTER. The DB14 is a special purpose direct box for applications such as connecting a laptop computer to a sound system. Or where needed, a stereo source signal can be separated, and individual volume controls used for each track such as a rehearsing choir to a music track. It has stereo RCA inputs, a stereo 1/8" (3.5mm), 2 volume controls, RCA and XLR outputs, and uses no power.

DESCRIPTION

Right/Left In: RCA and 1/8" input jacks. For connection to a laptop computer, CD player, DVD player, etc.

R/L Out: RCA jacks for sending the input signals out to a line level amplification device.

Low Z Out: Male XLR jack for sending out a mix of both A and B signals.

Right/Left Volume: Controls the level of each input signal independently.

SPECIFICATIONS

Max Input Level: Max Output Level: Frequency Response: Weight: Size: +20 dB +20dB RCA, 0 dB XLR (Low Z) 50 Hz to 16 kHz 1 lb (.45 kg) 2" x 3.5" x 1.25" (5 x 9 x 3.2 cm)

Owners Manual

CONNECTION

Shown below is a connection example for the DB14b. The laptop computer's stereo output is connected to the 3.5mm stereo input of the DB14b via a stereo 3.5mm to 3.5mm cable.

NOTE: The Right and Left signal levels are adjusted individually by the Right and Left Volume controls.

The XLR output is connected to a balanced low impedance input on a snake or a mixer balanced input.


The two stereo RCA outputs may be connected to unbalanced high impedance stereo, or individual right and left mixer inputs.



WARRANTY

For information on the Rolls One Year Limited Warranty, and to register this product, visit our website at **www.rolls.com**

SCHEMATIC

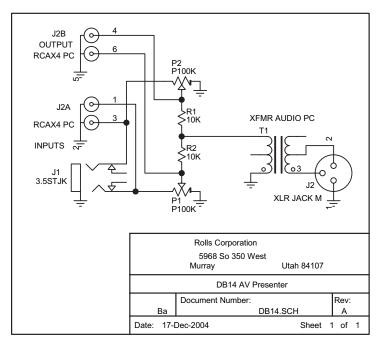



DB14 AV PRESENTER

- Splits Stereo RCA and stereo /8" (3.5mm) signals ndividual Right and Left level
- controls Transformer balanced XLR mono output.

used tion from a laptop computer, or a rehearsing choir to a music track. It has stereo RCA and be separated, outputs, and 8" inputs, 2 volume controls, applications where The DB14 is a special purpose direct for each uses 1 track and individual no മ such as stereo powe RCA and XLR an AV presenta source volume controls box nal and for മ

DB14 AV Presenter

Rolls Corporation

 $\frac{1}{3}$

თ თ

œ

σ