DL4 DURAPLEX OMNIDIRECTIONAL WATERPROOF LAVALIER MICROPHONE

SPECIFICATIONS

(SUBJECT TO CHANGE)

Microphone Capsule	MEMS		
Polar Pattern	Omnidirectional		
Frequency Response	20 Hz to 20 kHz		
Sensitivity	-42.5 dBV (7.5 mV _{RMS}) @ 1 kHz		
Self-Noise	31 dB SPL-A A-weighted, Equivalent Acoustical		
Signal-to-Noise Ratio	63 dB		
Maximum SPL	132.0 dB SPL 1 kHz @ 1% THD, typical		
Dynamic Range	101.0 dB Typical		
Microphone Current Draw	220 μA, maximum		
Bias Voltage Recommended Operating Voltage	5 VDC		
Housing	Molded ABS		
Polarity	MTQG: Positive Pressure on diaphragm produces positive voltage on Pin 3 with respect to Pin 1 LEMO: Positive pressure on diaphragm produces positive voltage on Pin 3 with respect to Pin 1		
Cable Diameter	1.6 mm		
Cable Length	66.0 in (1.67 m)		
Net Weight	15.0 g (0.53 oz)		
Capsule Dimensions (L × D)	14.5 mm × 5.2 mm		

AVAILABLE MODELS

DL4B/0-LM3-A	DuraPlex Omnidirectional Lavalier Mic, LEMO Connector (Black)		
DL4B/O-MTQG-A	DuraPlex Omnidirectional Lavalier Mic, MTQG Connector (Black)		
DL4C/O-LM3-A	DuraPlex Omnidirectional Lavalier Mic, LEMO Connector (Cocoa)		
DL4C/O-MTQG-A	DuraPlex Omnidirectional Lavalier Mic, MTQG Connector (Cocoa)		
DL4T/O-LM3-A	DuraPlex Omnidirectional Lavalier Mic, LEMO Connector (Tan)		
DL4T/O-MTQG-A	DuraPlex Omnidirectional Lavalier Mic, MTQG Connector (Tan)		
DL4W/O-LM3-A	DuraPlex Omnidirectional Lavalier Mic, LEMO Connector (White)		
DL4W/O-MTQG-A	DuraPlex Omnidirectional Lavalier Mic, MTQG Connector (White)		

OVERVIEW

Available in lavalier or headset form, DuraPlex has been extensively tested to ensure an IP57 dust-resistant, waterproof rating. Whether shooting reality TV, mounting a professional theatrical tour, or wherever audio takes you, contending with the elements won't slow you down. As comfortable on the beach as it is in a broadcast studio, DuraPlex features a neutral, full sound quality that lives up to the highest audio standards.

The advanced 1.6 mm Shure Plex cable, first introduced with the award-winning TwinPlex subminiature microphone, lasts longer than competing cables due to a dual redundant ground which doubles as a secondary shield. It also offers virtually zero "memory effect," won't kink, and is fully paintable.

FEATURES

- 5 mm omnidirectional subminiature design for discrete placement and improved gain-before-feedback
- · IP57 dust-resistant, waterproof rated
- · Neutral, full sound quality for film, broadcast, speech, theater, and performance applications
- · Advanced 1.6 mm Shure Plex cable:
 - · Dual redundant ground in cable serves as secondary shield for unprecedented longevity
 - · Immune to memory effect and kinks
 - · Fully paintable with typical theater paints, pens, and polishes
- Presence Cap included for tailored frequency response provides additional vocal clarity and presence (3-4 dB boost near 10 kHz)
- · Available in four colors: Black, Cocoa, Tan, White
- · Available in two connector types: TA4F (mTQG) and LEMO
- Kit includes the following accessories: Case, Foam Windscreen, Snap-fit Windscreen, Single Tie Clip, Sticky Mount, TQG Locking Collar (mTQG/TA4F SKUs only)



DL4B
DuraPlex Omnidirectional Waterproof
Lavalier Microphone (Black)



DL4 DURAPLEX OMNIDIRECTIONAL WATERPROOF LAVALIER MICROPHONE

FURNISHED ACCESSORIES

Single Tie Clip
Presence Cap
Snap-Fit Windscreen
Foam Windscreen
Sticky Mount
Case
Threaded TA4F Adapter




Lavalier Accessory Kit
For MTQG SKUs (shown in black)


REPLACEMENT ACCESSORIES

RPMDL4WS/B	Foam Windscreens, Black, Qty. 5	RPMDL4STC/T	Single Tie Clip, Tan, Qty. 3	RPMDL4SM	Sticky Mount, Qty. 3
RPMDL4WS/C	Foam Windscreens, Cocoa, Qty. 5	RPMDL4STC/W	Single Tie Clip, White, Qty. 3	RPM40TS	Sticky Mount Adhesives (15 Pieces)
RPMDL4WS/T	Foam Windscreens, Tan, Qty. 5	RPMDL4DTC/B	Dual Tie Clip, Black, Qty. 3	RPM40TS/50	Sticky Mount Adhesives (50 Pieces)
RPMDL4WS/W	Foam Windscreens, White, Qty. 5	RPMDL4DTC/C	Dual Tie Clip, Cocoa, Qty. 3	RPM400TQG	TA4F-XLR Preamp
RPMDL4SFWS/B	Snap-Fit Windscreens, Black, Qty. 3	RPMDL4DTC/T	Dual Tie Clip, Tan, Qty. 3	RPM400LEM0	LEM03-XLR Preamp
RPMDL4SFWS/C	Snap-Fit Windscreens, Cocoa, Qty. 3	RPMDL4DTC/W	Dual Tie Clip, White, Qty. 3	RPMDL4CASE	Zippered lavalier carrying pouch
RPMDL4SFWS/T	Snap-Fit Windscreens, Tan, Qty. 3	RPMDL4FC/B	Frequency Cap, Black, Qty. 5		
RPMDL4SFWS/W	Snap-Fit Windscreens, White, Qty. 3	RPMDL4FC/C	Frequency Cap, Cocoa, Qty. 5		
RPMDL4STC/B	Single Tie Clip, Black, Qty. 3	RPMDL4FC/T	Frequency Cap, Tan, Qty. 5		
RPMDL4STC/C	Single Tie Clip, Cocoa, Qty. 3	RPMDL4FC/W	Frequency Cap, White, Qty. 5		

POLAR PATTERN



FREQUENCY RESPONSE

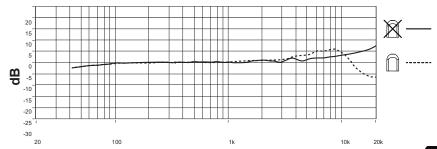

Hz

