

## UNIDIRECTIONAL DYNAMIC CARTRIDGE REPLACEMENT

## **GENERAL**

The Model R45 is a direct replacement cartridge for Shure UNIDYNE® III Series Microphones in the Model 545 Series and the Model PE54 Series.


## INSTALLATION AND CONNECTIONS

To replace the R45, proceed as follows:

 Holding the microphone in an upright vertical or near vertical position, grasp the cartridge case firmly and unscrew (turn counterclockwise) and remove the cartridge case-grille assembly from the microphone (see Figure 1).

NOTE: If the cartridge case-grille is firmly locked to the microphone case, use a leather strap wrench to loosen the cartridge case.

- 2. Unsolder the leads from old cartridge terminals.
- 3. Connect the leads to the new replacement cartridge. Note the leads colors and terminal coding as in Figure 1.
- Screw the new cartridge into the microphone case (turn clockwise) AFTER twisting in the opposite direction (counterclockwise) five turns to twist the leads.
- 5. Tighten the new cartridge case-grille assembly securely to the microphone case using a leather strap wrench if necessary.

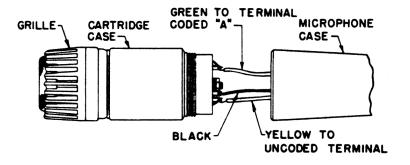

CARTRIDGE REPLACEMENT FIGURE 1



SHURE Incorporated http://www.shure.com United States, Canada, Latin America, Caribbean: 5800 W. Touhy Avenue, Niles, IL 60714-4608, U.S.A. Phone: 847-600-2000 U.S. Fax: 847-600-1212 Intl Fax: 847-600-6446 Europe, Middle East, Africa: Shure Europe GmbH, Phone: 49-7131-72140 Fax: 49-7131-721414

Asia, Pacific:

Shure Asia Limited, Phone: 852-2893-4290 Fax: 852-2893-4055

